

# IND05, AVSU-EFP, AVS2000, AV160LF24, P7065, P7064, VTR0241210

## Accessories

In order to complete your fire detection system you may need some accessories like sounders, remote indicators or electromagnetic door release units. They are all compatible with our range of panels as well for conventional as for analogue.



**IND05 Remote alarm indicator:** Makes possible the optical alarm repetition. Compatible with our complete range of detectors. Angle of vision 180°. Water proof version: **IND05E**

<b>Weight:</b> 35g	<b>Operating voltage:</b> 15Vdc to 30Vdc (<2Vdc for 05 range)
<b>Dimension:</b> 85 x 64 x 33 mm	<b>Quiescent current:</b> 0A
<b>IP rating:</b> 22 (water proof: 43)	<b>Alarm current (24Vdc):</b> 10mA



**AVSU-EFP Outdoor sounder:** AVSU-EFP is a sounder with IP54. It is attended for outdoor use. Sound power: 110dB @1meter.

<b>Weight:</b> 1Kg	<b>Modulated sound:</b> 440 / 554 Hz
<b>dimension:</b> 101 x 101 x 132 mm	<b>Operating voltage:</b> 18-60Vdc
<b>IP rating:</b> 54	<b>Consumption (48Vdc) :</b> 40mA




**AVS2000/W White color piezo indoor sounder:** AVS2000 has a round shape which allows a wall or ceiling fixing. It has also a white off color which makes it discrete in the installation. It operates with a piezo-electric cell that guarantees a poor consumption. Its side hearing ensures an excellent broadcasting of the sound. 2 sound level settings. Sound power: 90 to 100dB @1meter. AVS2000/R: red version

<b>Weight:</b> 200g	<b>Operating t°:</b> 0 to 50°C
<b>dimension:</b> Ø104; 84mm high	<b>Operating voltage:</b> 15-60Vdc
<b>IP rating:</b> 31	<b>Consumption (24Vdc) :</b> 6mA min to 25mA max



**AV160LF24 Piezo indoor sounder with xenon flash:** Red color internal siren for fire alarm systems. Its classic and functional aesthetic is suitable for residential, commercial and industrial environments. Programmable sound. Sound power: 100dB @1meter.

<b>Weight:</b> 220g	<b>Operating t°:</b> -10 to 55°C
<b>dimension:</b> 168 x 105 x 41 mm	<b>Operating voltage:</b> 12-27 Vdc
<b>IP rating:</b> 30	<b>Consumption (24Vdc) :</b> 270 to 330mA



**P7065 optical acoustic alarm panel:** Suitable for any risk situation such as fire, flooding, gas leak, etc. where visual and/or acoustic information is needed. This particularly fine and pleasant design is suitable for installations in hotels, shops, shopping malls, cinemas. Lighting with high luminosity LED. Self-powered with Ni-Cd battery for **P7068 version**. Sound power 95dB.

<b>Weight:</b> 590g (760g for P7068 version)	<b>Material:</b> polycarbonate
<b>dimension:</b> 331 x 150 x 68	<b>Operating voltage:</b> 10,8-28Vdc
<b>IP rating:</b> 45	<b>Average consumption:</b> 95mA



**P7064 optical acoustic alarm panel:** Suitable for any risk situation such as fire, flooding, gas leak, etc. where visual and/or acoustic information is needed. **Self-powered version: SP7066.** Sound power 100dB.

<b>Weight:</b> 400g	<b>Material:</b> ABS
<b>dimension:</b> 110 x 285 x 68	<b>Operating voltage:</b> 12/24Vdc
<b>IP rating:</b> 55	<b>Consumption:</b> 60mA (24V)





**VTR0241210 Electromagnetic door release unit:** Electromagnetic door holders mounted in a steel box + rotating equipped keeper-plate. It is designed to hold open fire or smoke stop doors, for convenience and then release automatically them in response to an emergency. The keeper plate is mounted on a rotating and shock-absorbing support for angles ≤60°. Release push-button.

<b>dimension:</b> 85 x 70 x 45 mm	<b>Holding force:</b> 50daN
<b>IP rating:</b> 42	<b>P:</b> 1,2W
<b>Colour, material:</b> white epoxy, metallic box	<b>Operating voltage:</b> 24 Vdc ±10%






SECURITY  
DETECTION  
DIRECT  
DISTRIBUTION


# IND05, AVSU-EFP, AVS2000, AV160LF24, P7065, P7064, VTR0241210 Accessories




**AVSU-EFP**

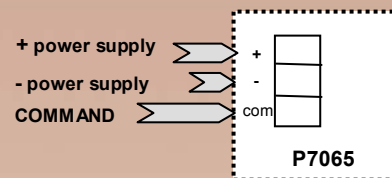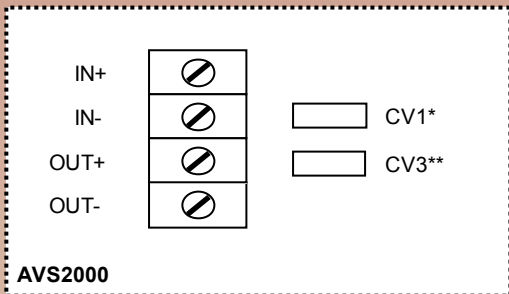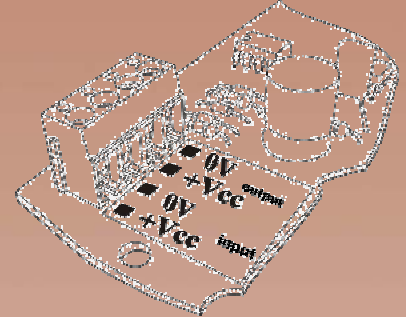

\* Max sound level: jumper CV1 on  
 \*\* Min sound level: jumper CV1 and CV3 on

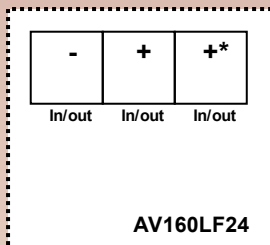

\* positive connection for modulated sound

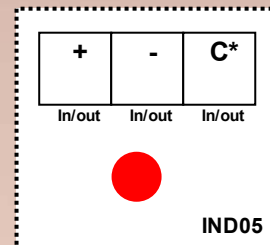

\* positive connection for 05 range

<u>REFERENCE</u>	<u>DESCRIPTION</u>
IND05	Remote alarm indicator (IND05E: water proof version)
AVS2000/W	White piezo indoor sounder
AVS2000/R	Red piezo indoor sounder
P7065	Optical acoustic alarm panel
P7068	Auto powered optical acoustic alarm panel
P7064	Optical acoustic alarm panel
P7066	Auto powered optical acoustic alarm panel
AV160LF24	Piezo indoor sounder with xenon flash
VTR0241210	Electromagnetic door release unit
AVSU-EFP	Outdoor sounder